


"AZ"-type, sluice with a lower flow-through, with a three-side closing

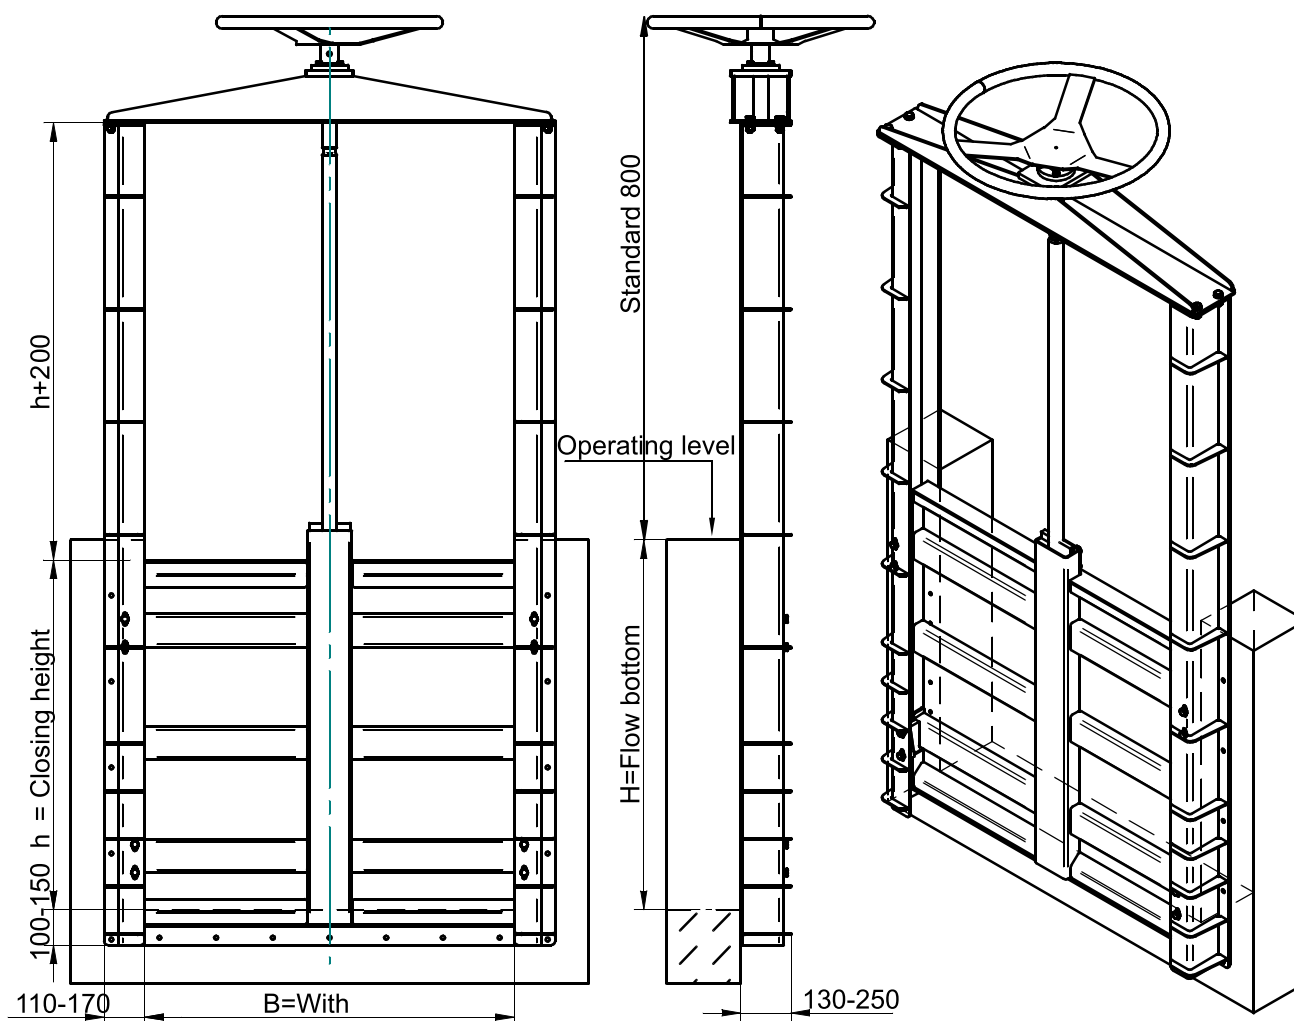

Purchase order sample	Type	Size	Installation	Material	Operation
	AZ	- BxhxH	-F	-1	-K

AZ

SELECTION

STANDARD DIMENSIONS	B	h
	600	400-500-600-800-1000-1200
	800	600-800-1000-1200-1400-1500-1600
	1000	from 600 to 2000 in 200 mm, 1500
	1200	from 600 to 2000 in 200 mm, 1500
	1400	from 800 to 2000 in 200 mm, 1500
	1500	from 800 to 2000 in 200 mm, 1500
	1600	from 800 to 2000 in 200 mm, 1500
	1800	from 1000 to 2000 in 200 mm, 1500
	2000	from 1000 to 2000 in 200 mm, 1500
Gate valves for sluices can also be custom made.		

Installation

Wall-mounted	F
Embedded in concrete	B
Mounted in channel	V

Material

Wnr.: 1.4301	1
Wnr.: 1.4541	2
Wnr.: 1.4571	3
St52C hot galv.	4

Operation

Manual	K
Double-spindle	D
Torque amplifiers	F
Motorised	M

Size (mm)

B= Opening width	
h= Closing height	
H= Flow bottom	