


"KT"– type, circular locking sliding sluice

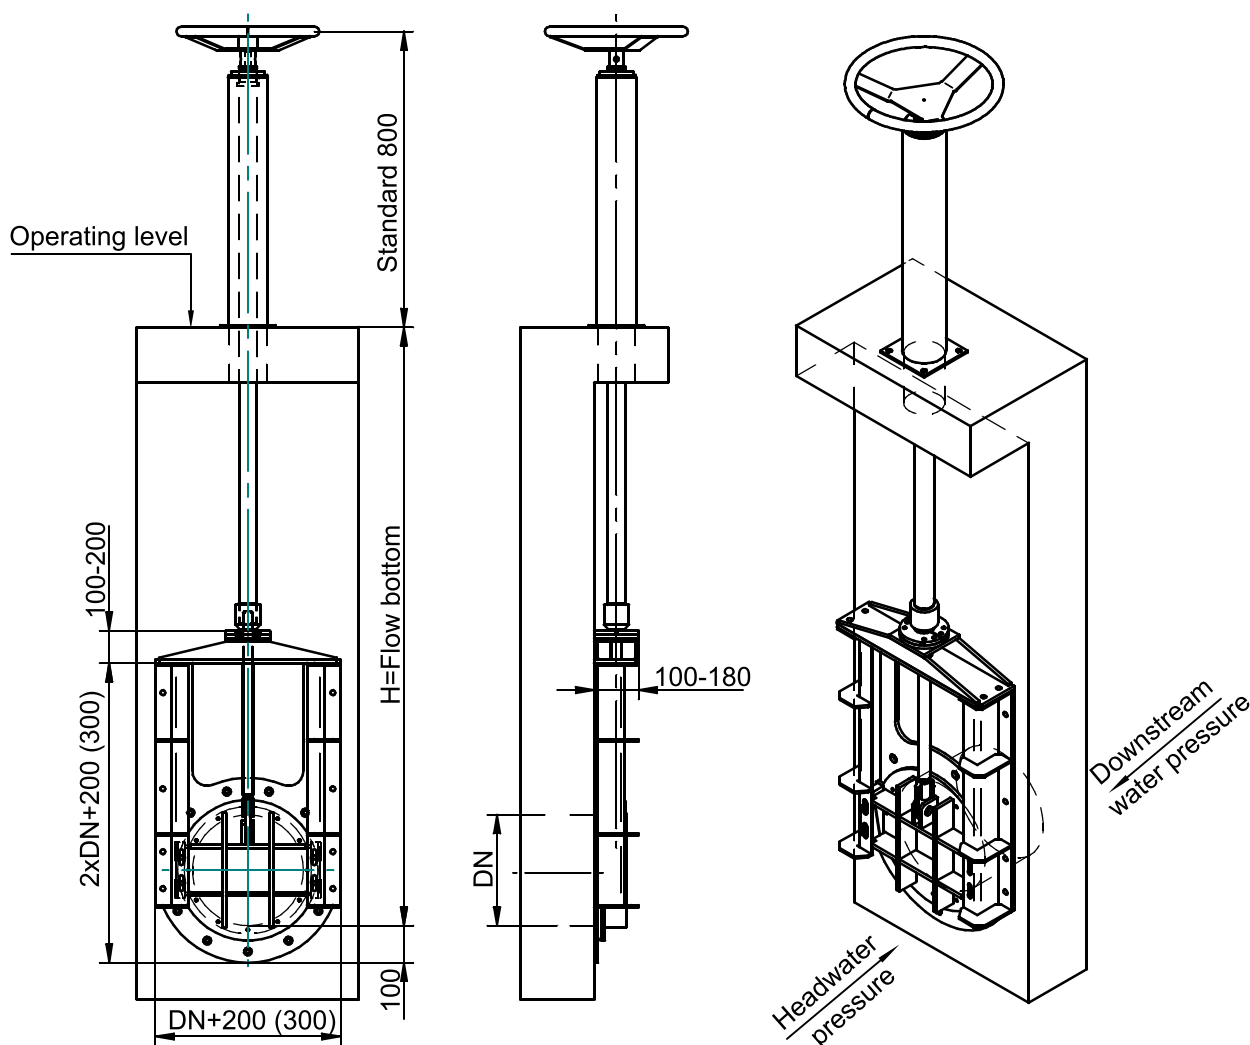

Purchase order sample	Type	Size	Installation	Material	Operation	Pressure
	KT	- DNxH	-F	-1	-K	-Sp

KT

SELECTION

STANDARD DIMENSIONS	DN
	300-400-500-600-800-1000
	1200-1400-1500-1600-1800-2000
	Gate valves for sluices can also be custom made.

Installation

Wall-mounted	F
For pipe flange	C

Material

Wnr.: 1.4301	1
Wnr.: 1.4541	2
Wnr.: 1.4571	3
St52C hot galv.	4

Operation

Manual	K
Torque amplifier	F
Motorised	M

Size (mm)

DN=	
Nominal diameter	
H=	
Flow bottom	

Pressure (metre water column)

Standard pressure Upstream 6.00 m/ downstream 3.00 m	Sp
High pressure Upstream 10.00 m/ downstream 8.00 m	Mp