


Longitudinal dredger blade sedimentator

The product group consists of standard type units. The technology and size-dependent structural units may vary.

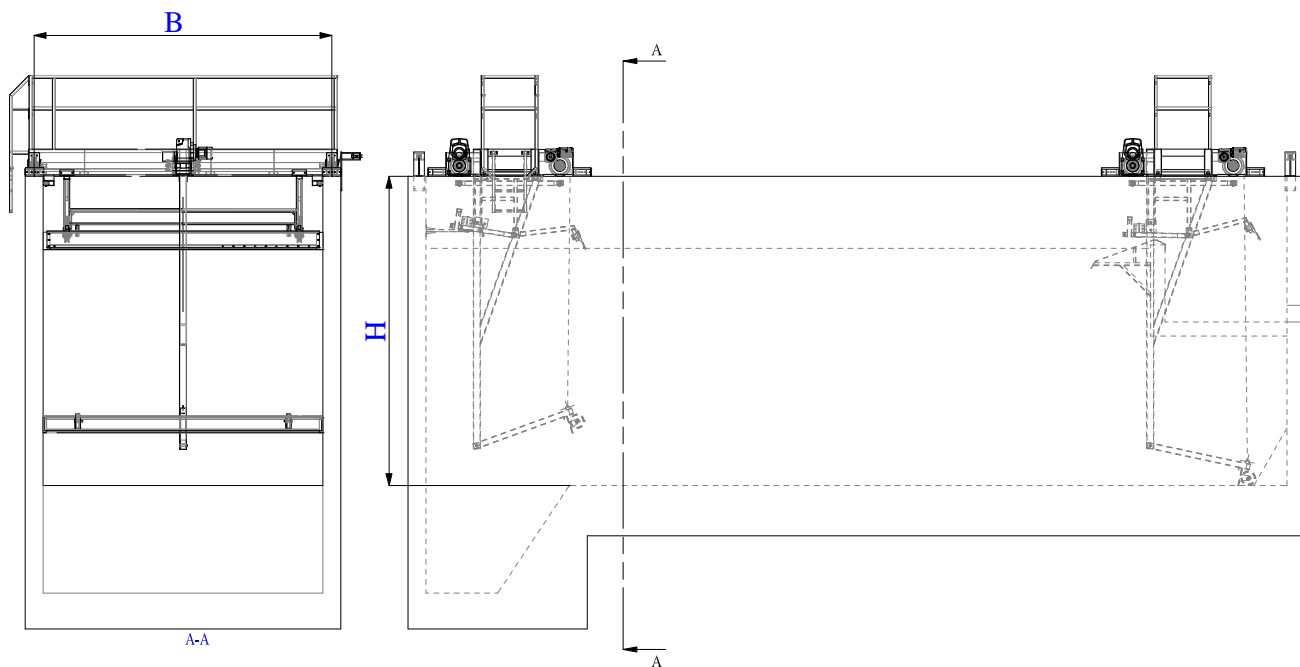

Inclination of the bridge:
L/200, L/400

Power load:
0,37-0,55 kW

Speed of the bridge:
0,03 m/s

Tread (B)
to 3-15 m

Material of the bridge: the parts contacting the water are made of anti-corrosion steel, other parts are of carbon steel, zinc-coated, anti-corrosion steel, or glass-fibre reinforced plastics, depending on the size

Example:
LAK-UK-12,0 / 3,5

Mode of Ordering:

LAK-UK - /

↑ ↑
Tread (B) (m) Structure depth (m) (H)