
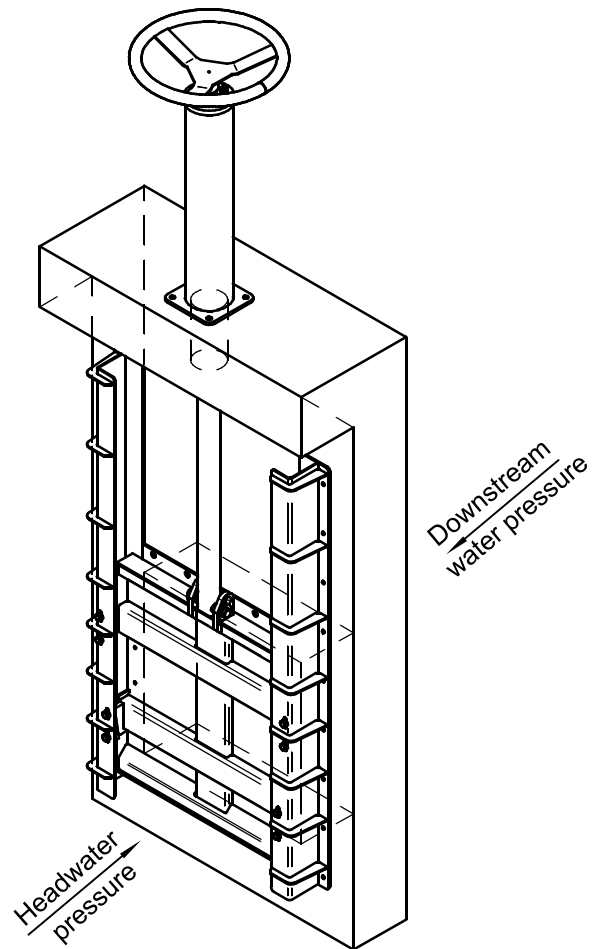


"ZS"-type, rectangular sluice

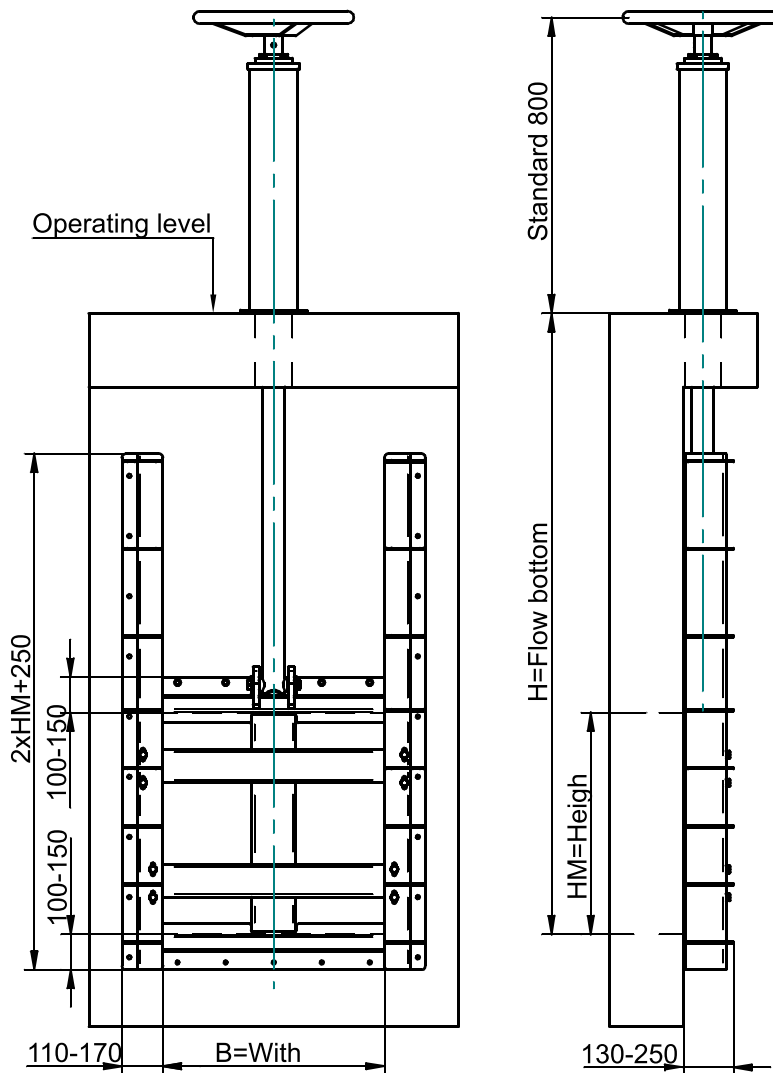

Purchase order sample	Type	Size	Installation	Material	Operation	Pressure
	ZS	- BxHMxH	-F	-1	-K	-Sp

ZS

SELECTION

Installation

Wall-mounted	F
Embedded in concrete	B

Material

Wnr.: 1.4301	1
Wnr.: 1.4541	2
Wnr.: 1.4571	3
St52C hot galv.	4

Operation

Manual	K
Double-spindle	D
Torque amplifiers	F
Motorised	M

Size (mm)

B= Opening width	
HM= Opening height	
H= Flow bottom	

Pressure (metre water column)

Standard pressure Upstream 6.00 m/ downstream 3.00 m	Sp
High pressure Upstream 10.00 m/ downstream 8.00 m	Mp

STANDARD DIMENSIONS	B	HM
600		400-500-600-800-1000-1200
800		600-800-1000-1200-1400-1500-1600
1000		from 600 to 2000 in 200 mm, 1500
1200		from 600 to 2000 in 200 mm, 1500
1400		from 800 to 2000 in 200 mm, 1500
1500		from 800 to 2000 in 200 mm, 1500
1600		from 800 to 2000 in 200 mm, 1500
1800		from 1000 to 2000 in 200 mm, 1500
2000		from 1000 to 2000 in 200 mm, 1500
Gate valves for sluices can also be custom made.		