

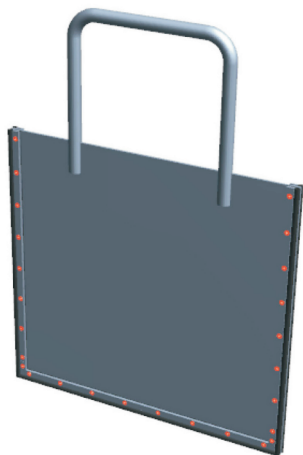



Operating modes

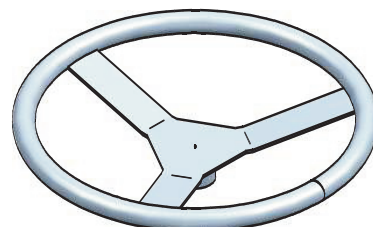


Board lifted out directly by hand Kd
with handle fixed to the board,
only for T-type sluice boards

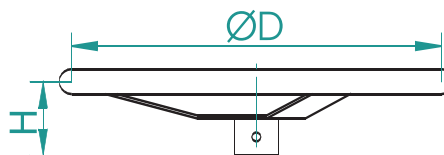


Handwheel for manual operation Kk
with the diameter dimensioned
according to the size of the sluice




Crank for manual operation Kh
dimensioned according to the size
of the sluice

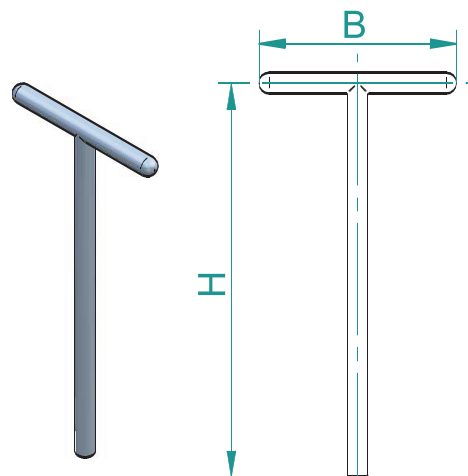


Manual T-key Kt,
for above ground or under-
ground operation, for
example use in cock boxes

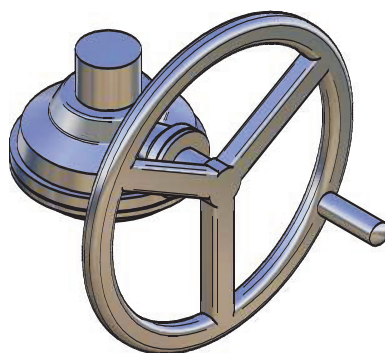

Torque amplifier F
AUMA, ÁVM, SCHIEBEL

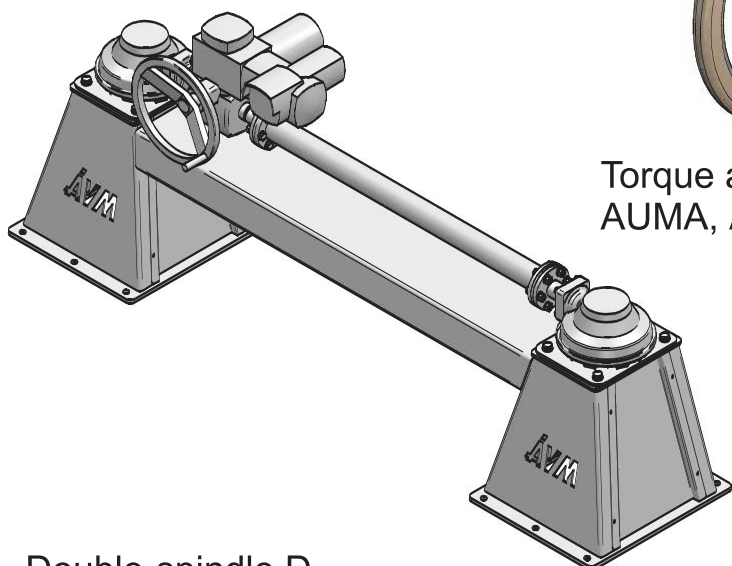

Double-spindle D,
Drive gear: AUMA, SCHIBEL, REGADA
Torque amplifiers: AUMA, ÁVM, SCHIBEL

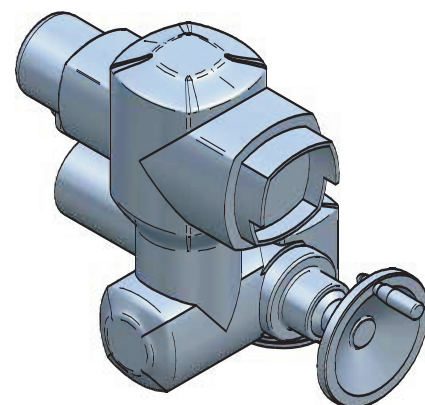

Motorosed M,
AUMA, SCHIBEL, REGADA